




## Recessed Troffer Retrofit Kit Frosted Acrylic Lens LED

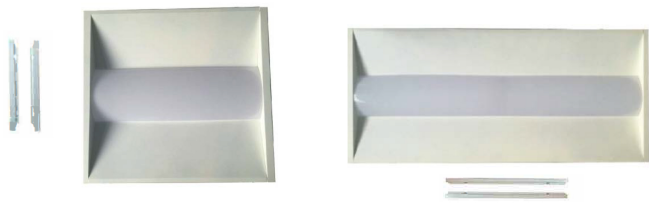

The RT-RFKVL offers the look and feel of a fluorescent luminaire - subtle soft direct elements, interest and depth across the ceiling plane - with a contemporary look that blends with today's commercial spaces. The extruded acrylic lens with softening overlay provides a diffused luminance, with the effective combination of excellent light transmission and haze.

### Features and Benefits

- Dimmable and Non Dimmable
- Input at AC 100-277V or AC 100-382V
- 0-10V dimming
- Can be battery back up
- Five year warranty
- UL listed and DLC available
- For installation instructions, please view:

### Application

- Commercial buildings
- Offices
- Hospitals
- Schools
- Standard 15/16" inverted T-Bar grid ceilings

### Specifications

- **Housing** - Low profile body with matte white sloped side members
- **Direct Optical Component** - High reflectance optical engine
- **Luminaire Type** - Recessed troffer fixture body assembled 2'x2', and 2'x4' sizes.

### Certifications



Made in the USA

### Ordering Information

MODEL#	DIMENSIONS (FT)	WATTAGE	EFFICACY	CRI	CCT	WARRANTY	VOLTAGE	DIMMABLE
RFKVL22-25W-3.5K	2x2	25	135	80	3500	5 Years	120-277V	
RFKVL22-25W-4K	2x2	25	135	80	4000	5 Years	120-277V	X
RFKVL22-36W-3K	2x2	36	135	80	3000	5 Years	120-277V	
RFKVL22-36W-4K	2x2	36	135	80	4000	5 Years	120-277V	X
RFKVL22-36W-5K	2x2	36	135	80	5000	5 Years	120-277V	X
RFKVL24-36W-3K	2x4	36	135	80	3500	5 Years	120-277V	X
RFKVL24-36W-4K	2x4	36	135	80	4000	5 Years	120-277V	X
RFKVL24-50W-3K	2x4	50	135	80	3500	5 Years	120-277V	
RFKVL24-50W-4K	2x4	50	135	80	4000	5 Years	120-277V	X
RFKVL24-50W-5K	2x4	50	135	80	5000	5 Years	120-277V	X
RFKVL14-25W-4K	1x4	25	135	80	4000	5 Years	120-277V	
RFKVL14-36W-4K	1x4	36	135	80	5000	5 Years	120-277V	X

OnTimeLighting.com | 215.245.3400  
47B Runway Road, Levittown, PA 19057